



Slidelock

The Travel Lock for Slide Out Rooms!

- | Easily Adjustable from 11" to 44"
- | Custom as well as Standard Sizes Available
- | Maintain the Integrity of the External Dust and Water Seal While Traveling
- | Stores in a Convenient Area
- | No Bulky Handle
- | No Greasy Parts
- | Easy Adjustment
- | Several Additional Uses




Arrive With Confidence Your Vehicle
Will Be Clean and Dry!



Slidelock

Installation Instructions

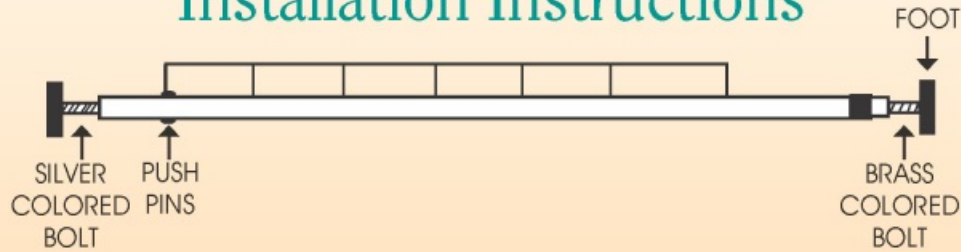

- 1 Always install the SlideLock as straight as possible.
2. Measure opening and adjust with push pins to dimension nearest opening size but not larger. To adjust, depress both pins and pull rod end with brass bolt out until push pins snap into next hole.
3. Make final adjustments by unscrewing feet until SlideLock is approximately 1/4" shorter than opening. Foot on brass bolt has 4 1/2" of adjustment. Foot on silver bolt has 1 1/2" of adjustment.
4. Place SlideLock in opening, push foot with silver bolt against outside wall and turn rod in clockwise direction until desired tension is applied. Always make sure SlideLock is tightly in place before use. Do not over tighten if used between unreinforced walls.
Alta is not responsible for damage caused by improper use.
5. If either foot overhangs edge allowing foot to roll over, turn foot upright to lock into place.
6. To remove SlideLock, simply twist rod in counter clockwise direction until loose. To reinstall, skip steps 2 and 3 and repeat steps 1 and 4.

Standard Sizes

11" - 16"
13" - 23"
17" - 34"
24" - 44"



Custom Sizes
available as well



Other Uses: 1) Additional Drying Rod 2) Clothing Rod 3) Patio Doors Lock

